


H2 Matrix modular card with Class A HDBaseT™, analog audio breakout and HDCP 2.2 (4K: 70m/230ft | 1080p: 100m/328ft)

TX-H2-AUD



Specification Sheet

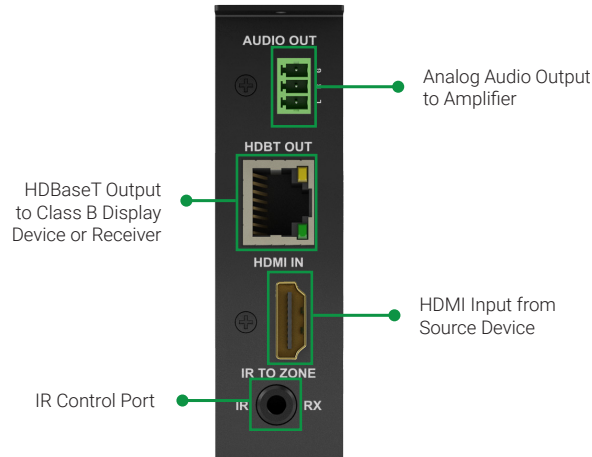

WyreStorm - Because the Technology Matters.

Introduction

Also enabling more to be made of audio capabilities, the TX-H2-AUD, offers stereo audio breakout of a zone with a 3-pin phoenix connector for analog audio.

Key Features

- HDMI input
- HDBaseT™ Output - Transmitting Class A HDBaseT™ which includes video, audio, control and power up to 70m/230ft of 4K and 100m/328ft of 1080p
- Stereo Audio Output - Offering stereo audio breakout of a zone with a 3-pin phoenix connector for analog audio
- IR RX - Allows control signals to be sent to the sink device

Compatible Models: MX-0606-HDBT-H2C | MX-0808-HDBT-H2C

In the Box

1x TX-H2-AUD Modular Card

Specifications

Audio and Video				
Inputs	1x HDMI 19-pin type A			
Outputs	1x HDBaseT 8-pin RJ-45 female 1x Audio Out (2ch Analog) 3-pin Phoenix Connector			
Audio Formats	2ch Analog 2ch PCM Multichannel: LPCM and Up to DTS-X and Dolby Atmos			
Video Resolutions (Max)	Resolution	HDMI	Cat6	Cat6a/7
	1920x1080p @60Hz 12bit	15m/49ft	100m/328ft	100m/328ft
	1920x1080p @60Hz 16bit	7m/23ft	70m/230ft	100m/328ft
	3840x2160p @24Hz 10bit 4:2:0 HDR	3m/10ft	70m/230ft	100m/328ft
	3840x2160p @30Hz 8bit 4:4:4	7m/23ft	70m/230ft	100m/328ft
	3840x2160p @60Hz 10bit 4:2:0 HDR	3m/10ft	NA	NA
	4096x2160p @60Hz 8bit 4:2:0	7m/23ft	70m/230ft	100m/328ft
4096x2160p @60Hz 8bit 4:4:4	7m/23ft	NA	NA	
Color Depth	DCI RGB HDR HDR10 Dolby Vision up to 30Hz HLG BT.2020 BT.2100			
Maximum Pixel Clock	HDMI: 600mHz HDBaseT: 297MHz			
Communication and Control				
HDMI	HDCP 2.2 DVI-D supported with adapter (not included)			
HDBaseT	HDMI HDCP 2.2 1-way PoH to Receiver IR RX to Receiver			
Ethernet	From Matrix - No Connection on card Bidirectional over HDBaseT			
IR	1x IR RX 3.5mm (1/8in) TRS Stereo To Receiver over HDBaseT			
Power				
Power Supply	Internal to Matrix			
PoH	48V 15.4W (1-way to Receiver)			
Max Power Consumption	Matrix Dependent			
Environmental				
Operating Temperature	Matrix Dependent			
Storage Temperature	Matrix Dependent			
Maximum BTU	Matrix Dependent			
Regulatory				
Safety and Emission	Matrix Dependent			

Right Product for the Right Application.

