

# Gefen

## Super Booster Plus for HDMI 1.3 USER MANUAL



[www.gefen.com](http://www.gefen.com)

## ASKING FOR ASSISTANCE

---

**Technical Support:**

Telephone (818) 772-9100  
(800) 545-6900

Fax (818) 772-9120

**Technical Support Hours:**

8:00 AM to 5:00 PM Monday thru Friday.

**Write To:**

Gefen Inc.  
C/O Customer Service  
20600 Nordhoff St.  
Chatsworth, CA 91311

support@gefen.com  
www.gefen.com

**Notice**

Gefen Inc. reserves the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

**Super Booster Plus for HDMI 1.3** is a trademark of Gefen Inc.

© 2008 Gefen Inc., All Rights Reserved

## TABLE OF CONTENTS

---

- 1 Introduction
- 2 Features
- 3 Panel Descriptions
- 4 Connecting and Operating Super Booster Plus for HDMI 1.3
- 5 Auto Equalization
- 6 Specifications
- 7 Warranty

# INTRODUCTION

---

## **The Gefen Super Booster Plus for HDMI 1.3**

The Gefen Super Booster Plus for HDMI 1.3 allows the extension of HDMI cables up to 200 feet (60m) from the HDMI source. The Super Booster Plus supports displays up to 1080p and HDMI 1.3 features such as deep color and lossless audio formats.

The Super Booster Plus model implements DDC re-clocking which will make HDCP handshaking and EDID transmission more reliable over long distances of copper cable.

## **How It Works**

Attach one end of your long HDMI cable to the HDMI source, then connect the other end of the long cable, near the display, to the input on the Gefen Super Booster Plus for HDMI 1.3. Connect the Display to the Super Booster Plus for HDMI 1.3 by attaching a cable between the display's HDMI input and the output on the Super Booster Plus. A beautiful HD picture will now be seen on the extended display.

The Gefen Super Booster Plus for HDMI 1.3 and HDMI cables can also be cascaded with additional Super Booster Plus for HDMI 1.3 units and cables (a technique known as “daisy chaining”) to create an even longer extension.

# FEATURES

---

## Features

- Perfect digital high definition video sent over long stretches of HDMI cables
- Locate an HDMI display up to 200 feet away from any HDTV source
- Supports resolutions up to 1080p, 2K, and 1920 x 1200
- HDMI/HDCP compliant

## HDMI 1.3 Features

- 225 MHz (up to 12 bit YUV 444 @ 1080p)
- Dolby TrueHD & DTS Master
- Deep Color Supported (XV Color)
- Lip-Sync Pass Through
- CEC Pass Through

## Includes:

- (1) Super Booster Plus for HDMI 1.3
- (1) 5V DC Power Supply
- (1) User's Manual


## PANEL LAYOUT

---

### Front Panel



### Back Panel

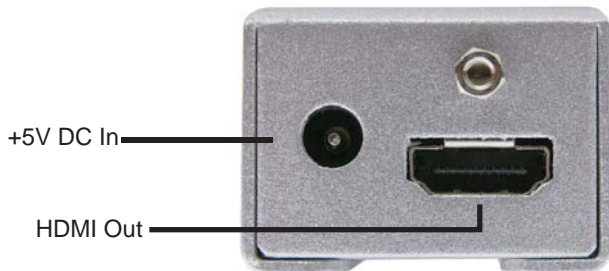

## CONNECTING AND OPERATING THE SUPER BOOSTER PLUS FOR HDMI 1.3

---



1. Connect the long HDMI cable from the source into the “HDMI In” on the front of Super Booster Plus for HDMI 1.3. Super Booster Plus for HDMI 1.3 is placed next to your display to regenerate the HDMI signal.
2. Connect a short HDMI cable from the “HDMI Out” connection in the back of Super Booster Plus for HDMI 1.3 to your display or projector
3. Plug the 5V DC power supply into Super Booster Plus for HDMI 1.3.
4. Plug the 5VDC wall mount power supply into the wall outlet.

### **Manual Equalization**

By default, Super Booster Plus for HDMI 1.3 is set to manual equalization. The service Dip Switch 2, located on the underside of the unit behind a silver colored metallic sticker, must be in the OFF position for manual EQ to be enabled. Dip Switch 1 relates to manual EQ short and long cable settings. By default, Dip Switch 1 is in the long cable mode (OFF). Adjust the EQ Trim Pot on the front of the unit to eliminate video noise by inserting a small flat-head tool into the Trim Pot port. Turn the Trim Pot in very small increments to EQ the video signal until all video noise is eliminated. If a short cable is being used and there is either video noise that cannot be tuned out or no image at all in the long cable mode, change the manual EQ setting to short cable mode by turning Dip Switch 1 to the ON position. Re-insert the adjustment tool and EQ the video signal. Use the diagram on the next page to locate and view the location and settings of the Dip Switches.

## AUTO EQUALIZATION

---



Dip Switch 2 can be used to turn on the automatic equalization function. Use this setting for ease of setup as this mode will automatically tune out unwanted video noise. To do this, turn Dip Switch 2 to the ON position. No manual adjustments to the EQ can be made in this mode using the EQ Trim Pot on the front of the unit. Dip Switch 1 will not have any effect in this mode. If video noise is still present in automatic EQ mode, return to manual EQ mode by turning Dip Switch 2 to the OFF position and manually tune the signal using the instructions on the previous page.



## SPECIFICATIONS

---

Video Amplifier Bandwidth .....	225 MHz
Input Video Signal .....	1.2 Volts p-p
Input DDC Signal .....	5 Volts p-p (TTL)
Single Link Range .....	1080p/1920 x 1200
HDMI Connector .....	type A 19 pin female
Dimensions .....	1.6"W x 1.1"H x 1.8"D
Shipping Weight .....	1 lb.