


# CVD3900-13

**(7) 26 AWG Coax, (2) 22/2 STP, Plenum**

**Description** Multi-Conductor-Type Cable - (7) 26 AWG Coax with (2) 22 AWG Shielded Twisted Pairs - Plenum

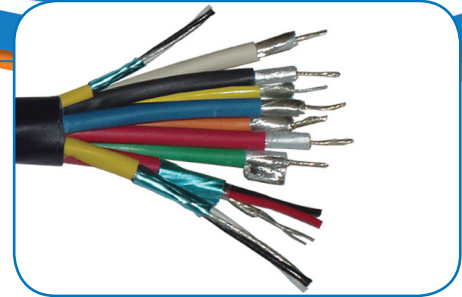

## Technical Specifications

### Element 1

Coaxes: 26 AWG (7/34), Tinned Copper,  
 Dielectric: Stranded Natural Foamed Fluorinated Ethylene Propylene, 0.072" Diameter  
 Outer Shield: Aluminum (In) / Polyester Tape, 25% Overlap  
 Inner Shield: 38 AWG Tinned Copper, 95% Coverage  
 Jacket: Polyvinyl Chloride, 0.009" Wall Thickness  
 Final Diameter.: 0.102"  
 Number of Coaxes: 7  
 Color Code: 1. Red, 2. Green, 3. Blue, 4. Black, 5. White, 6. Yellow, 7. Orange

### Element 2

Twisted Pairs: 22 AWG (7/30) Tinned Copper, Stranded Individually Shielded Twisted Pairs  
 Shield: Aluminum (In) / Polyester Tape, 25% Overlap  
 Drain Wire: 22 AWG (7/30) Tinned Copper  
 Jacket: Polyvinyl Chloride .007" Wall Thickness  
 Final Diameter: 0.105"  
 Number of Pairs: 3  
 Color Code: 1. Red & Black 2. Black & Yellow 3. White & Black

### Construction

Conductors: Elements 1, 2  
 Jacket: Polyvinyl Chloride  
 Final Diameter: 0.435"  
 Color: Dark Blue

### Approximate Weight:

125 lbs. per 1000 ft.

## UL Listing

Type CL2P as Specified in Article 800 of the National Electric Code

### Conductor Specifications

Nominal Attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-3.60
100	-5.10
200	-7.40
400	-11.0
750	-15.9
1000	-17.0