


# UHD HDBASET HDMI EXTENDERS & RECEIVERS

## HDBT-SET-6 (HDBT-1-ES-UHD + HDBT-1-RS-UHD)

- Supports HDMI 2.0/HDCP 2.2 downward compatible to HDMI 1.4/HDCP 1.x
- Extend HDMI 1.4 (1080P) signals up to 230 feet (70 meters)
- Extend HDMI 2.0 (UHD 60/4:4:4) signals up to 115 feet (35 meters)
- Supports CEC/3D pass through
- Supports Bi-directional RS-232
- Supports multiple IR control frequency
- Supports LPCM, Dobby True HD and Dolby Digital
- Uses a single CAT6A cable

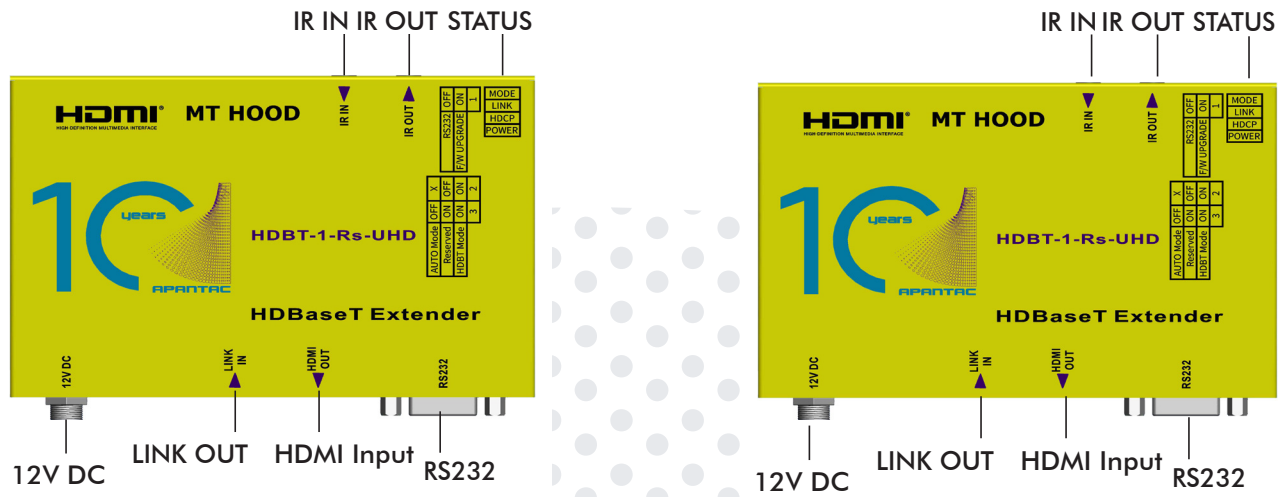

**Recommended cables:** Belden 2412F

MODEL	HDBT-1-Es-UHD	HDBT-1-Rs-UHD
DESCRIPTION	Single-port HDBaseT HDMI Extender	Single-port HDBaseT HDMI Receiver
HDMI Connectors		1 x HDMI Type A (Female)
RJ-45 Connectors		1 x RJ-45
RS-232 Connectors		1 x DB9 (female)
IR In		1 x 3.5 mm stereo jack
IR out		1 x 3.5 mm stereo jack
DIP Switch		1 x 3 Pin
LED Indicators		1 x 4 in 1 LED
Maximum Resolution		4K/UHD@60Hz 4:4:4
Maximum Distance		115 ft (35 meters) for 4K/UHD 60Hz / 230 ft (70 meters) for 4K/UHD 30Hz or 1080P60Hz
Power		DC 12V 1.5 A with locking
Weight		300 g
Dimension		126 x 83 x 25 mm